


External Dimensions (mm)

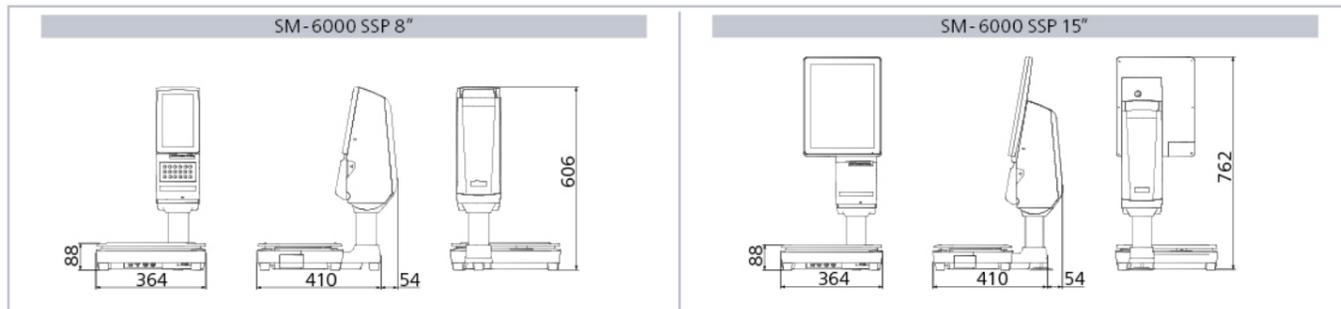

Specifications

Capacity	Max 6kg	Max 15kg / 30lb	Max 30kg
Single Interval	1 / 3,000 e = 2g	e = 5g / 0.01lb	e = 10g
	1 / 6,000 or 1 / 7,500 e = 1g	e = 2g	e = 5g
Capacity	Max 3 / 6kg	Max 6 / 15kg	Max 15 / 30kg
Multi Interval	1 / 3,000 e = 1 / 2g	e = 2 / 5g	e = 5 / 10g

Model	SM-6000 SSP 8\"/>	
Image		
Dimension WxDxH(mm)	364x464x606	364x464x762
Operator Display	8\"/>	15\"/>
Display Resolution	1 / 3,000, 1 / 6,000 & 1 / 7,500	
Keyboard	18 x Keypad (For 8\"/>	
Types	Linerless With Auto-Cutter	
Roll Diameter	Max 95mm	
Label / Roll Width	Max 62mm	
Receipt Print Width	Max 60mm	
Printing Speed	Up to 150mm / second*	
Print Resolution	300 dpi	
Power Source	Compliance to 80PLUS Power Saving**	
Operating Temperature	-10°C to +40°C	
Humidity	15% to 85% RH Non-Condensing	
Standard Interface	Ethernet 10 / 100 Base T, 4 x USB 2.0, 1 x RJ11	
Net Weight	13.3 kg	14.9 kg
Options	Wireless LAN IEEE 802.11 a / b / g / n / ac, e.Sense, BYOC, Contactless, e.Label with Hi-Touch, InfoTag, Base Station	
Factory Option	Auto Tilt Sensor, Speed ID	

* To achieve maximum print speed, high sensitivity thermal paper is necessary.

** 100-120Vac Gold (North America, Canada and Japan)
210-240Vac Silver (European, UK and most of Asia)



CE • Specifications are subject to change without prior notice
• Meet or exceed OIML Class III requirements

DIGI SINGAPORE PTE. LTD.

4 Leng Kee Road #05-02 / 03 / 04 / 05 / 11 / 12
SIS Building SINGAPORE 159088
TEL : +65 6472 2996
SALES: +65 6378 5387
FAX : +65 6863 4614
URL : www.digisystem.com/sg/
E-MAIL : customer_support@sg.digi-group.com

TERAOKA SEIKO Co., Ltd.

13-12 Kugahara 5-chome, Ohta-ku,
Tokyo 146-8580, JAPAN
TEL: +81-3-3752-2131
FAX: +81-3-3752-5562
URL: www.digisystem.com

SM-6000 SSP / A / 0920



SM-6000 SSP

PC Based Self-Service System Scale Printer



SM-6000 SSP 15"

Searching for a New Balance


ECO-INNOVATION AT YOUR FINGERTIPS



Bring Your Own

Incorporating radio frequency identification technology (RFID) to register and detect container tare, retailers can now offer a convenient and sustainable shopping experience.

- One-time container tare registration
- Reusable RFID label able to withstand repeated washing
- Fuss-free weighing process
- Eliminate packaging and food waste

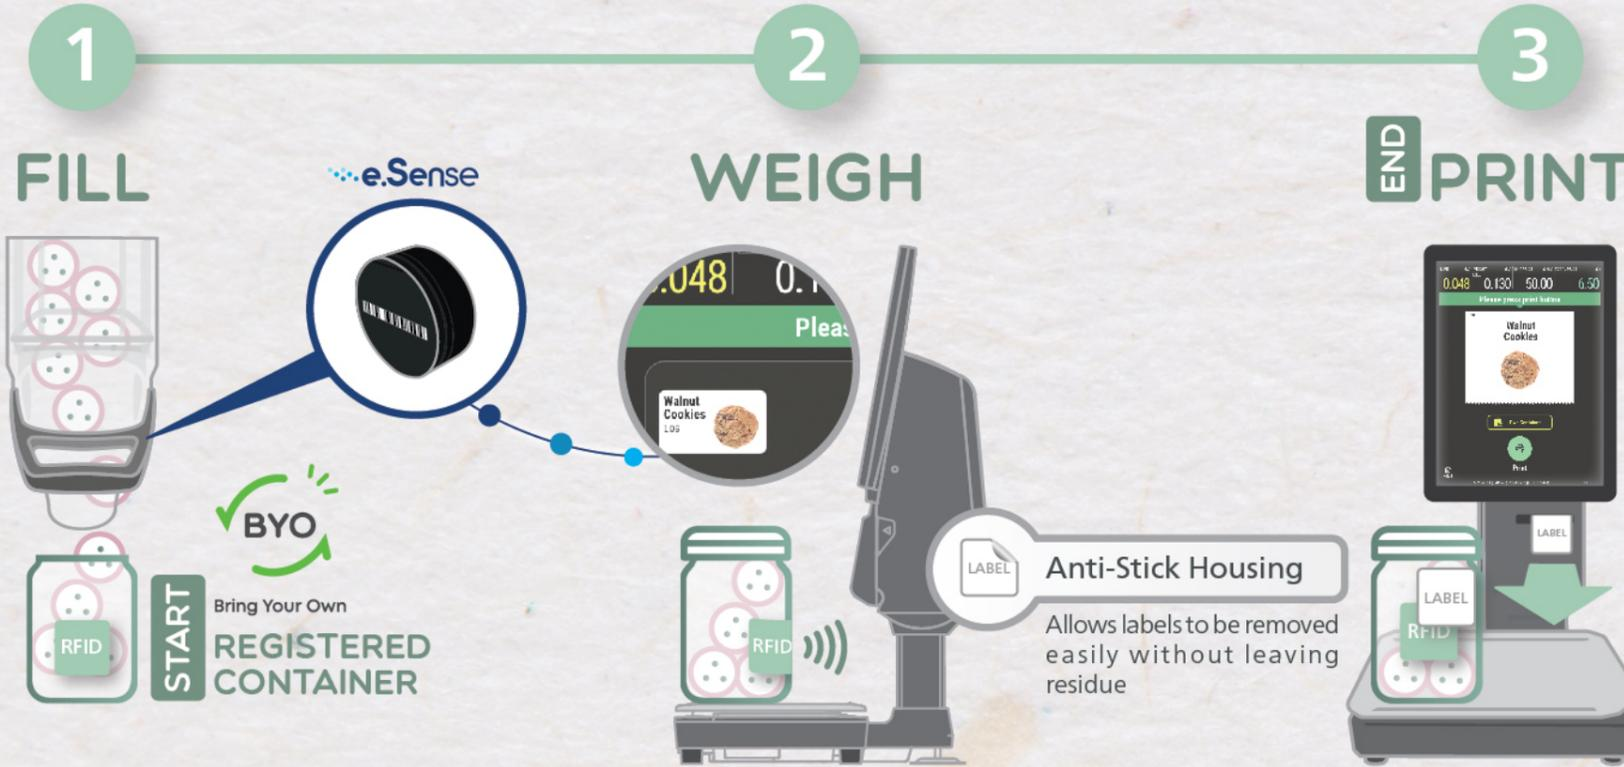

e.Sense is a motion-activated sensor that can be installed on container or dispenser to transmit PLU code automatically to the scale.

- Eliminate human errors
- Compact and easy to set up
- Reduce shrinkage

Remote Notification

Built-in label low sensor notifies operators on roll replacement before label runs out.

FASTER. SMARTER. GREENER

e.Label.. with Hi-Touch

e.Label combines a high definition e-Paper display with the tap-activated Hi-Touch feature, delivering optimal readability with swift PLU call-up.

- Enhanced operational efficiency with error-free automatic PLU call-up
- IP67 certified for frequent cleaning
- Available in 3 sizes (1.54", 2.7", 4.2")

Contactless Self-Weighing

Via Bluetooth technology, customers can enjoy a safe and touch-free weighing process. Average transaction time is greatly shortened as PLU information is automatically transmitted between the scale and the customer's mobile device.

This significantly minimises the risk of cross-contamination within the store while giving both customers and employees peace of mind.

- Safety**
Minimise infection risk
- Hygiene**
No touch required on scale
- Fast**
Auto PLU call up
- Simple**
Easy operation
- Self-Service**
Reduce reliance on operator



InfoTag..

As an enterprise-grade electronic shelf label (ESL), the InfoTag offers accurate and timely pricing updates while its integrated connective technologies helps to drive shopper engagement.

- Price automation via wireless updates
- Easy access to product information with QR code and NFC capabilities



Linerless Labeling

With no backing paper and twice as many label prints per label roll, linerless labeling helps businesses to maximise inventory space while reducing logistic costs.

- Reduce carbon footprint
- Easy and quick roll replacement
- Flexible label design
- Crisp and appealing label presentation

